
450-3326 Solder Mount Socket, For 0.060 [1,52] to 0.062 [1,57] Diameter Pins

RECOMMENDED MOUNTING HOLE 0.102 [2,59] ± 0.002 [0,05], #38 DRILL MIN HOLE DEPTH 0.200 [5,08]

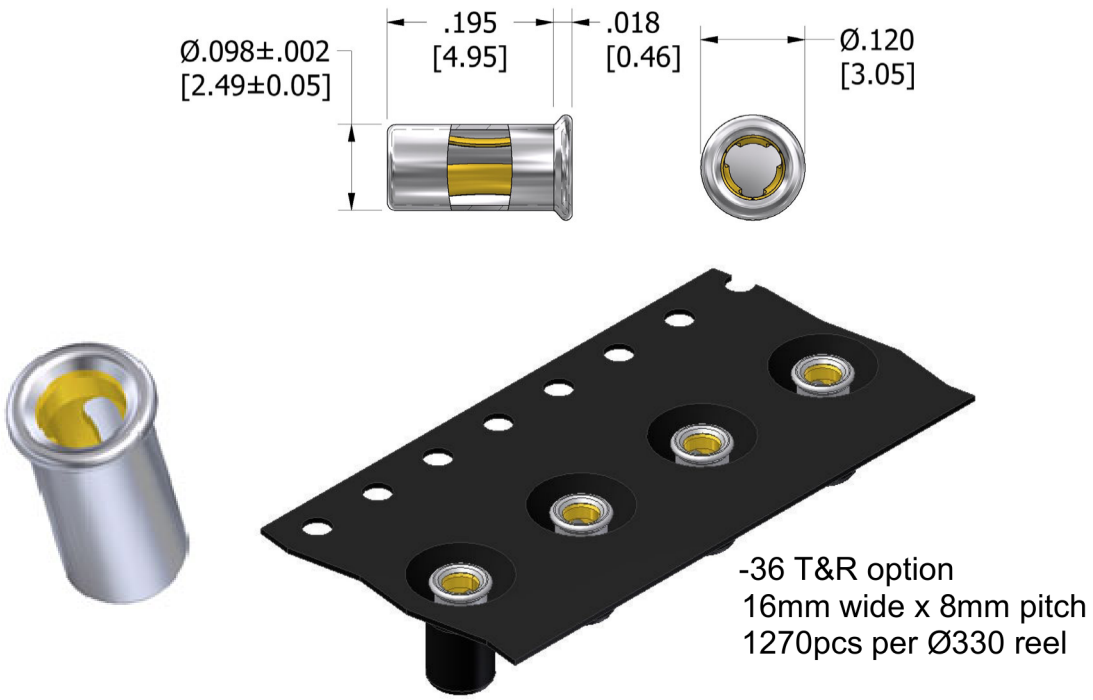

HOW TO ORDER CODE	450-3326-01-XX-YY	BASIC PART NO XX = FINISH; YY = PACKAGING -00 BULK -36 T&R

MATERIALS

COMPONENT	MATERIAL	FINISH [-03]	FINISH [-04]	FINISH [-06]	FINISH [-93]
Body	Brass	Gold 0.25um over Nickel	Electro Tin	Electro Tin	Gold 0.1um over Nickel
Spring	Beryllium copper	Gold 0.75um over Nickel	Electro Tin	Gold 0.75um over Nickel	Gold 0.25um over Nickel

NOTES

Dimensions in inches [mm]
Tolerance unless otherwise stated ±0.005 [0.13]

COPYRIGHT © 27 OCT 2026